


### STANDARD WHITE HUB AND STUB AXLES SPECIFICATIONS

| MODEL | CAPACITY<br>EACH STUB<br>@ 25 KPH | STUB   |        |          | SPIGOT<br>DIA A | P.C.D.<br>DIA B | FLANGE<br>DIA C | FLANGE<br>TO SEAL<br>DIM D | STUB<br>LENGTH<br>DIM E | STUD<br>DIA<br>F | No. OF<br>STUDS | JOURNAL DIA<br>INNER - OUTER |        | BEARING No.<br>INNER - OUTER |        |
|-------|-----------------------------------|--------|--------|----------|-----------------|-----------------|-----------------|----------------------------|-------------------------|------------------|-----------------|------------------------------|--------|------------------------------|--------|
|       |                                   | ROUND  | SQUARE | MATERIAL |                 |                 |                 |                            |                         |                  |                 |                              |        |                              |        |
| B457  | 1500 Kg                           |        | 63 mm  | K1045    | 114 mm          | 152.4 mm        | 203 mm          | 57 mm                      | 250 mm                  | 9/16" UNF        | 6               | 45mm                         | 30mm   | 30209J                       | 30206J |
| B461  | 3500 Kg                           | 75 mm  |        | K1045    | 160 mm          | 205 mm          | 250 mm          | 62 mm                      | 300 mm                  | M18 x 1.5        | 6               | 65 mm                        | 50 mm  | 32213                        | 32210  |
| B464  | 3500 Kg                           |        | 80 mm  | K1045    | 160 mm          | 205 mm          | 250 mm          | 62 mm                      | 300 mm                  | M18 x 1.5        | 6               | 65 mm                        | 50 mm  | 32213                        | 32210  |
| B458  | 4000 Kg                           |        | 80 mm  | K1045    | 220 mm          | 275 mm          | 320 mm          | 57 mm                      | 350 mm                  | M18 x 1.5        | 8               | 70 mm                        | 50 mm  | 30214                        | 30210  |
| B462  | 5500 Kg                           |        | 90 mm  | K1045    | 220 mm          | 275 mm          | 320 mm          | 57 mm                      | 350 mm                  | M18 x 1.5        | 8               | 80 mm                        | 55 mm  | 32216                        | 30311  |
| B468  | 6500 Kg                           | 92 mm  |        | 4140     | 220 mm          | 275 mm          | 320 mm          | 57 mm                      | 350 mm                  | M22 X 1.5        | 8               | 80 mm                        | 55 mm  | 32216                        | 30311  |
| B526  | 8000Kg                            | 110 mm |        | K1045    | 280 mm          | 335 mm          | 394 mm          | 85 mm                      | 365 mm                  | M22 X 1.5        | 10              | 85 mm                        | 75 mm  | 33217                        | 33215  |
| B522  | 15000 Kg                          | 110 mm |        | 4140     | 280 mm          | 335 mm          | 394 mm          | 85 mm                      | 365 mm                  | M22 X 1.5        | 10              | 85 mm                        | 75 mm  | 33217                        | 33215  |
| B470  | 20000 Kg                          | 140 mm |        | K1045    | 318 mm          | 400 mm          | 450 mm          | 111 mm                     | 176 mm                  | M22 X 1.5        | 12              | 120 mm                       | 100 mm | 30224J                       | 30220J |

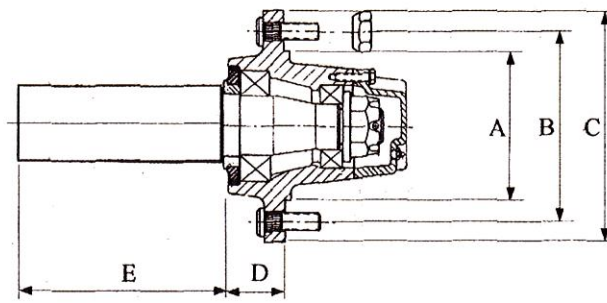

### MECHANICAL ENGINEERS - METAL FOUNDERS

18130 Warrego Highway, Dalby  
PO Box 350, Dalby Queensland 4405

Telephone: (07) 4672 5800 • Facsimile: (07) 4672 5899 • [Email: info@whiteindustries.com.au](mailto:info@whiteindustries.com.au)

[www.whiteindustries.com.au](http://www.whiteindustries.com.au)

